





## LED磁吸照明系统 LED MAGNETIC LIGHTING SYSTEM


20款  
20 style



明装/吸顶式  
Ceiling mounted




嵌入式  
Recessed type

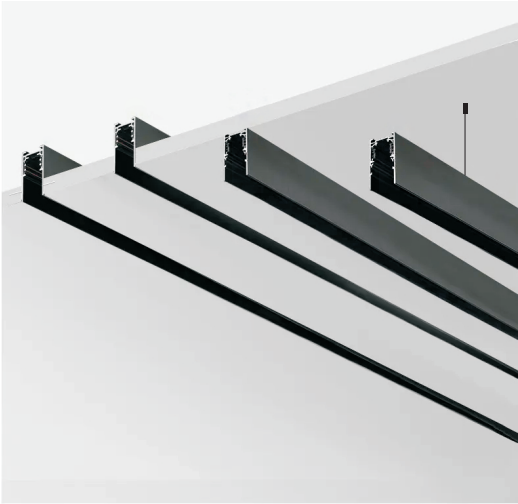


### 4种安装方式


4种安装方式，满足安装的多样化需求。  
4 installation modes to meet the diversified needs of installation.




吸顶式安装  
Ceiling mounted



悬吊式安装  
Suspended installation



预埋式安装  
Pre-embedded type



窄边嵌入式安装  
Recessed type



Warm Cold

### 调光调色

4种调光方式，有线、无线，满足多样化需求。  
4 dimming modes, wired and wireless, to meet diversified needs.




20款

23.6mm



20款 磁吸照明系统

20-type LED Magnetic Lighting System

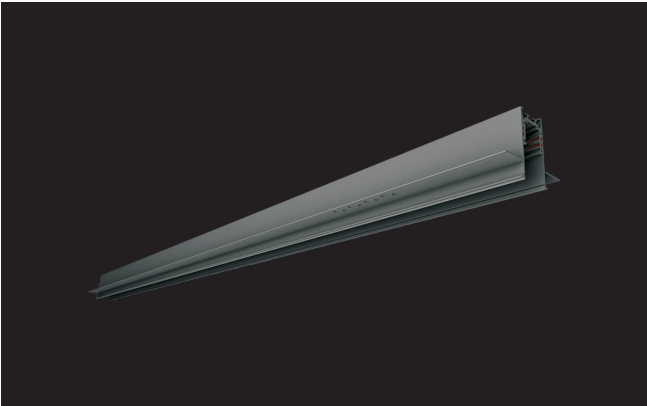



预埋款磁吸轨道  
Pre-embedded type magnetic absorption track

H-C13


规格 size  
L=500mm  
L=1000mm  
L=1500mm  
L=2000mm

外观颜色 Finish

- 砂白 Sand white
- 砂黑 Sand black

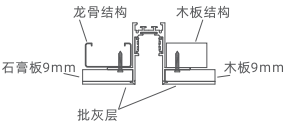

开孔宽度: 30mm  
Opening width:

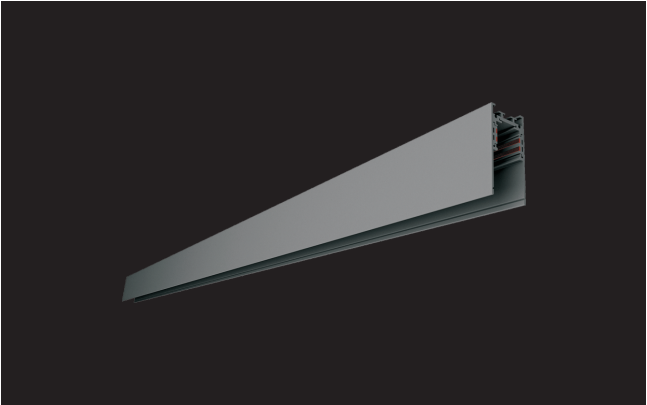




明装款磁吸轨道  
Surface mounted magnetic attraction track

H-C12

规格 size  
L=500mm  
L=1000mm  
L=1500mm  
L=2000mm

外观颜色 Finish

- 砂白 Sand white
- 砂黑 Sand black

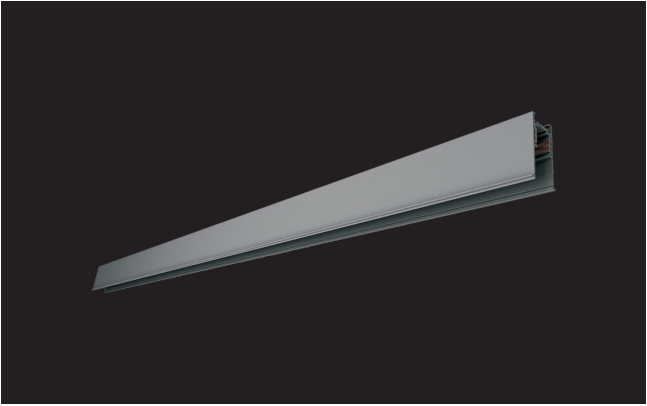



嵌装窄边款磁吸轨道  
Recessed type narrow side magnetic attraction track

H-C5

规格 size  
L=500mm  
L=1000mm  
L=1500mm  
L=2000mm


外观颜色 Finish

- 砂白 Sand white
- 砂黑 Sand black




安装配件:  
Installation accessories


嵌装平转角  
Recessed Flush corner  
H-C13-PZJ




嵌装内转角  
Recessed inner corner  
H-C13-NZJ




嵌装外转角  
Recessed outer corner  
H-C13-WZJ




明装平转角  
Surface mounted flat corner  
H-C12-PZJ




明装内转角  
Surface mounted inner corner  
H-C12-NZJ




明装外转角  
Exposed external corner  
H-C12-WZJ




窄边嵌装平转角  
Recessed Narrow edge flush corner  
H-C5-PZJ



窄边嵌装内转角  
Recessed Narrow edge embedded inner corner  
H-C5-NZJ



窄边嵌装外转角  
Recessed Narrow edge embedded outer corner  
H-C5-WZJ



接电器:  
Connecting device

接电器 (0.3m)  
Connecting device  
H-CP-JDQ03



接电器 (2m)  
Connecting device  
H-CP-JDQ20




I型接电器  
Type I grounding device  
H-CP-IJDQ




L型接电器  
Type L grounding device  
H-CP-LJDQ



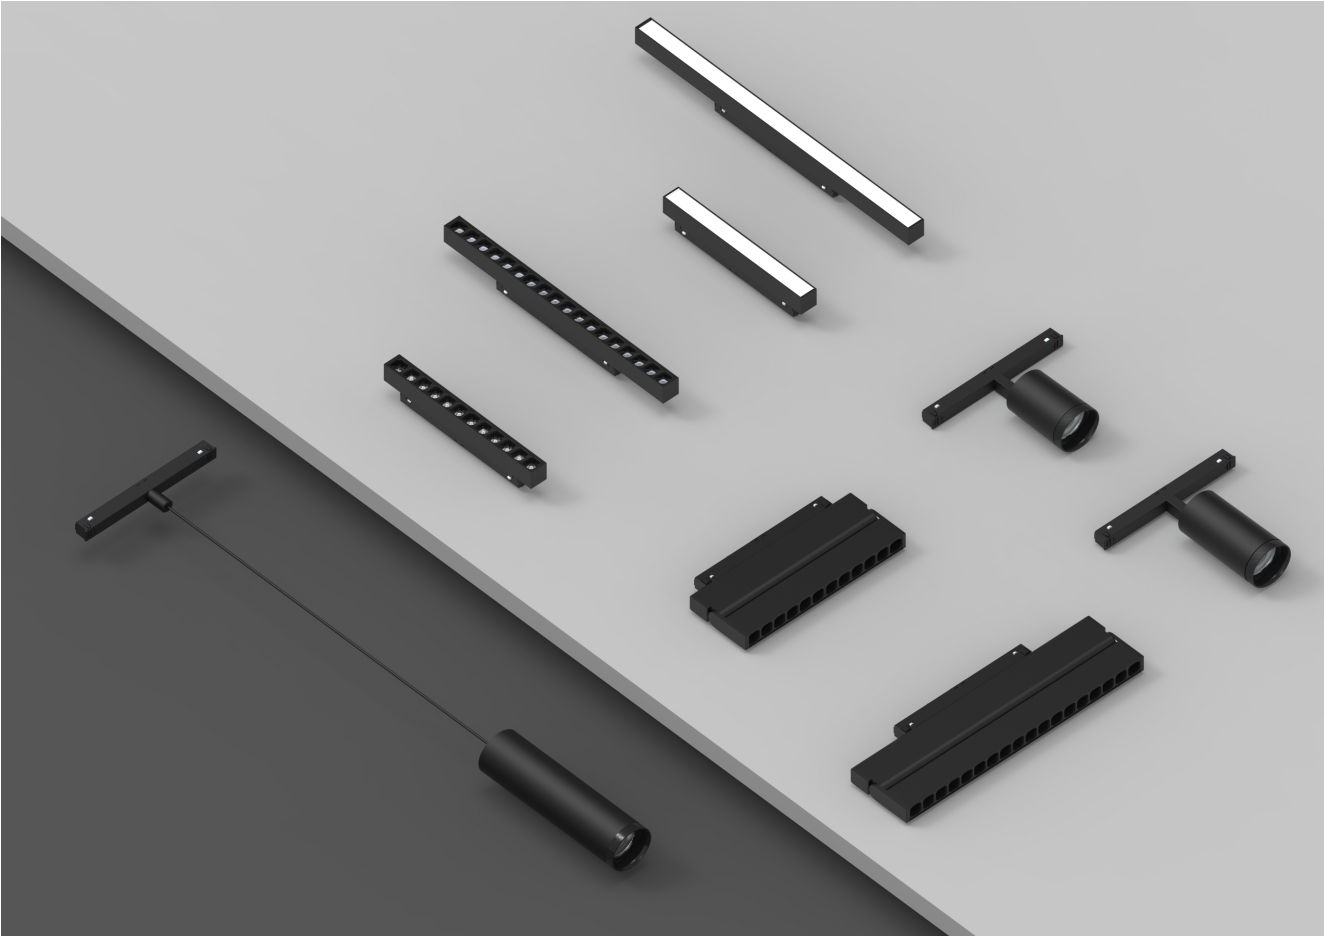



基本参数  
Specification

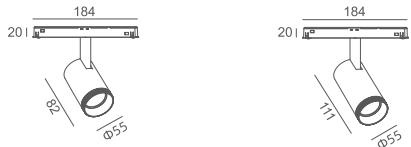


H-CS8S-10

H-CS8S-15

|                      |                   |     |
|----------------------|-------------------|-----|
| 功率 Power             | 10W               | 15W |
| 光效 Luminous Efficacy | 70lm/W            |     |
| 色温 CCT               | 3000K/3500K/4000K |     |
| 显色指数 CRI             | ≥90               |     |
| 光束角 Beam Angle       | 15°/24°/36°       |     |
| 材质 Material          | 铝 Aluminium       |     |
| 外观颜色 Finish          | ● 砂黑 Sand black   |     |

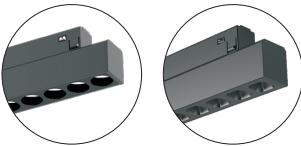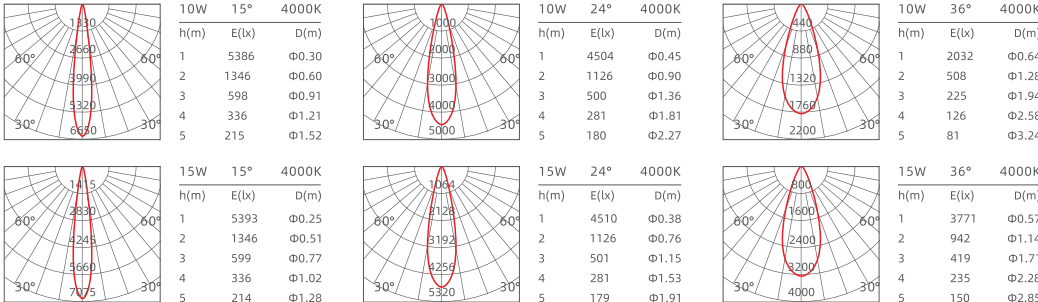

圆形格栅，方形格栅可选  
Round grille, square grille optional

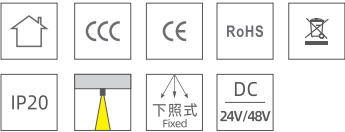


基本参数  
Specification




H-CG7S-10

H-CG7S-20


|                      |                   |     |
|----------------------|-------------------|-----|
| 功率 Power             | 10W               | 20W |
| 光效 Luminous Efficacy | 70lm/W            |     |
| 色温 CCT               | 3000K/3500K/4000K |     |
| 显色指数 CRI             | ≥90               |     |
| 光束角 Beam Angle       | 36°               |     |
| 材质 Material          | 铝 Aluminium       |     |
| 外观颜色 Finish          | ● 砂黑 Sand black   |     |

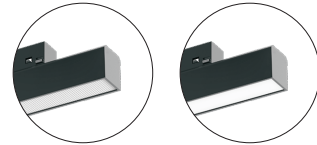

防眩菱晶板及常规扩散板可选  
Anti-glare rhombic or conventional diffusion panels available

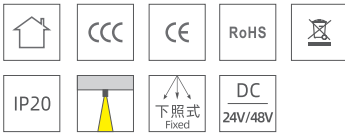

基本参数  
Specification

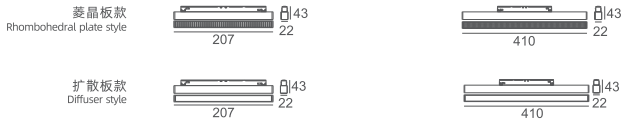

H-CL7S-10

H-CL7S-20

|                      |                                            |     |
|----------------------|--------------------------------------------|-----|
| 功率 Power             | 10W                                        | 20W |
| 光效 Luminous Efficacy | 80lm/W                                     |     |
| 色温 CCT               | 3000K/3500K/4000K                          |     |
| 显色指数 CRI             | ≥90                                        |     |
| 光束角 Beam Angle       | 菱晶板 Rhomboidal plate 83°/扩散板 Diffuser 100° |     |
| 材质 Material          | 铝 Aluminium                                |     |
| 外观颜色 Finish          | ● 砂黑 Sand black                            |     |


基本参数  
Specification





H-CX3A-10


H-CX3A-15

|                      |                   |     |
|----------------------|-------------------|-----|
| 功率 Power             | 10W               | 15W |
| 光效 Luminous Efficacy | 70lm/W            |     |
| 色温 CCT               | 3000K/3500K/4000K |     |
| 显色指数 CRI             | ≥90               |     |
| 光束角 Beam Angle       | 26°/36°           |     |
| 材质 Material          | 铝 Aluminium       |     |
| 外观颜色 Finish          | ● 砂黑 Sand black   |     |



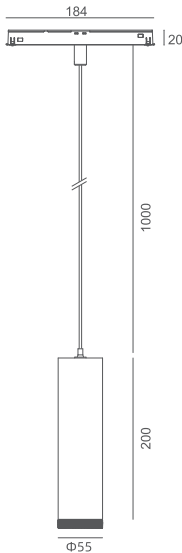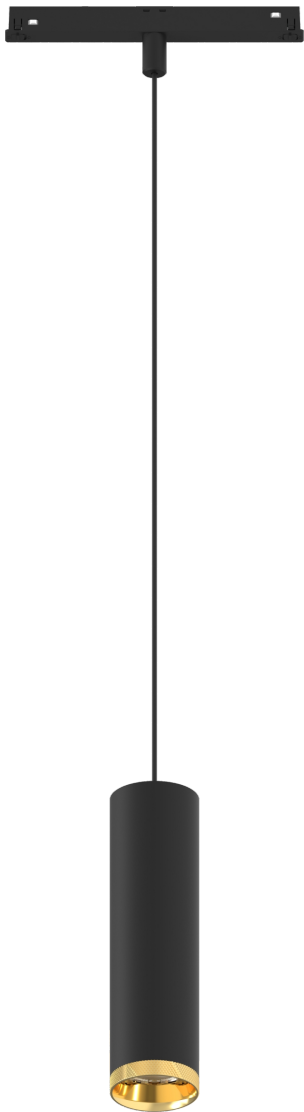

|                       |                                 |
|-----------------------|---------------------------------|
| 基本参数<br>Specification |                                 |
| 功率 Power              | 9W                              |
| 光效 Luminous Efficacy  | 75lm/W                          |
| 色温 CCT                | 3000K/3500K/4000K               |
| 显色指数 CRI              | ≥90                             |
| 光束角 Beam Angle        | 15°/24°/36°                     |
| 材质 Material           | 铝 Aluminium                     |
| 外观颜色 Finish           | 砂黑+喷油金 Sand black+Painting Gold |



配光参数：  
IES

